


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

TAG	X LOC	Y LOC	SIZE
A1	-3.062	2.300	$\phi .386$ THRU ALL
B1	-2.770	4.796	$\phi .625$ THRU ALL
B2	8.150	4.796	
C1	-2.440	3.508	
C2	2.124	8.223	$\phi .255 \nparallel .690$
C3	7.341	5.995	
D1	-1.639	7.604	$\phi .500$ THRU ALL 2X .03X45°
D2	7.064	7.604	
E1	-1.394	3.343	$\phi .375$ THRU ALL 2X .03X45°
F1	-1.201	.000	
F2	-.849	-.849	
F3	-.849	.849	
F4	.000	-1.201	
F5	.000	1.201	
F6	.849	-.849	
F7	.849	.849	
F8	1.201	.000	
G1	-.304	5.383	
G2	-.304	7.883	
G3	3.446	5.383	
H1	-.206	4.685	$\phi .565^{+.000}_{-.001}$ THRU ALL 2X .03X45°
J1	.000	.000	$\phi 1.2510$ 1.2504 THRU ALL └ $\phi 1.665 \nparallel .861^{+.005}_{-.000}$
K1	.116	6.022	$\phi .250$ THRU ALL FARSIDE .02X45°
K2	1.532	7.050	└ $\phi .625 \nparallel .890^{+.003}_{-.000}$
L1	.620	7.528	
L2	.983	7.528	4-40 UNC $\nparallel 1.000$
M1	.824	6.536	$\phi 1.001^{+.000}_{-.001}$ THRU ALL └ $\phi 1.155 \nparallel .848$
N1	1.069	4.533	$\phi .188 \nparallel 1.123$
T1	5.970	4.621	$\phi .8768$ $.8763$ THRU ALL └ $\phi 1.020 \nparallel .828^{+.004}_{-.000}$
P1	2.336	7.631	$\phi .375$ THRU ALL
R1	3.573	4.454	$\phi .440$ THRU ALL
U1	8.821	2.472	$\phi .564^{+.000}_{-.001}$ THRU ALL FARSIDE .03X45°

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
		C20-200	1		SIDE PLATE - SOLENOID SIDE	7075-T7351	1-5/8 X 11 X 14-5/8

REVISIONS			
REV	ECR	DESCRIPTION	DATE INITIAL APPROVED
2		AD DRAWN BY CANAM	5/30/2013
3	14-0117	CH'D TITLE BLOCK WAS RED BARN IS DART. ADDED MACHINE ENGRAVE NOTE. CH'D DIMENSION TOLERANCES ON NON-CRITICAL DIMENSIONS.	8/8/2014 DJN RW


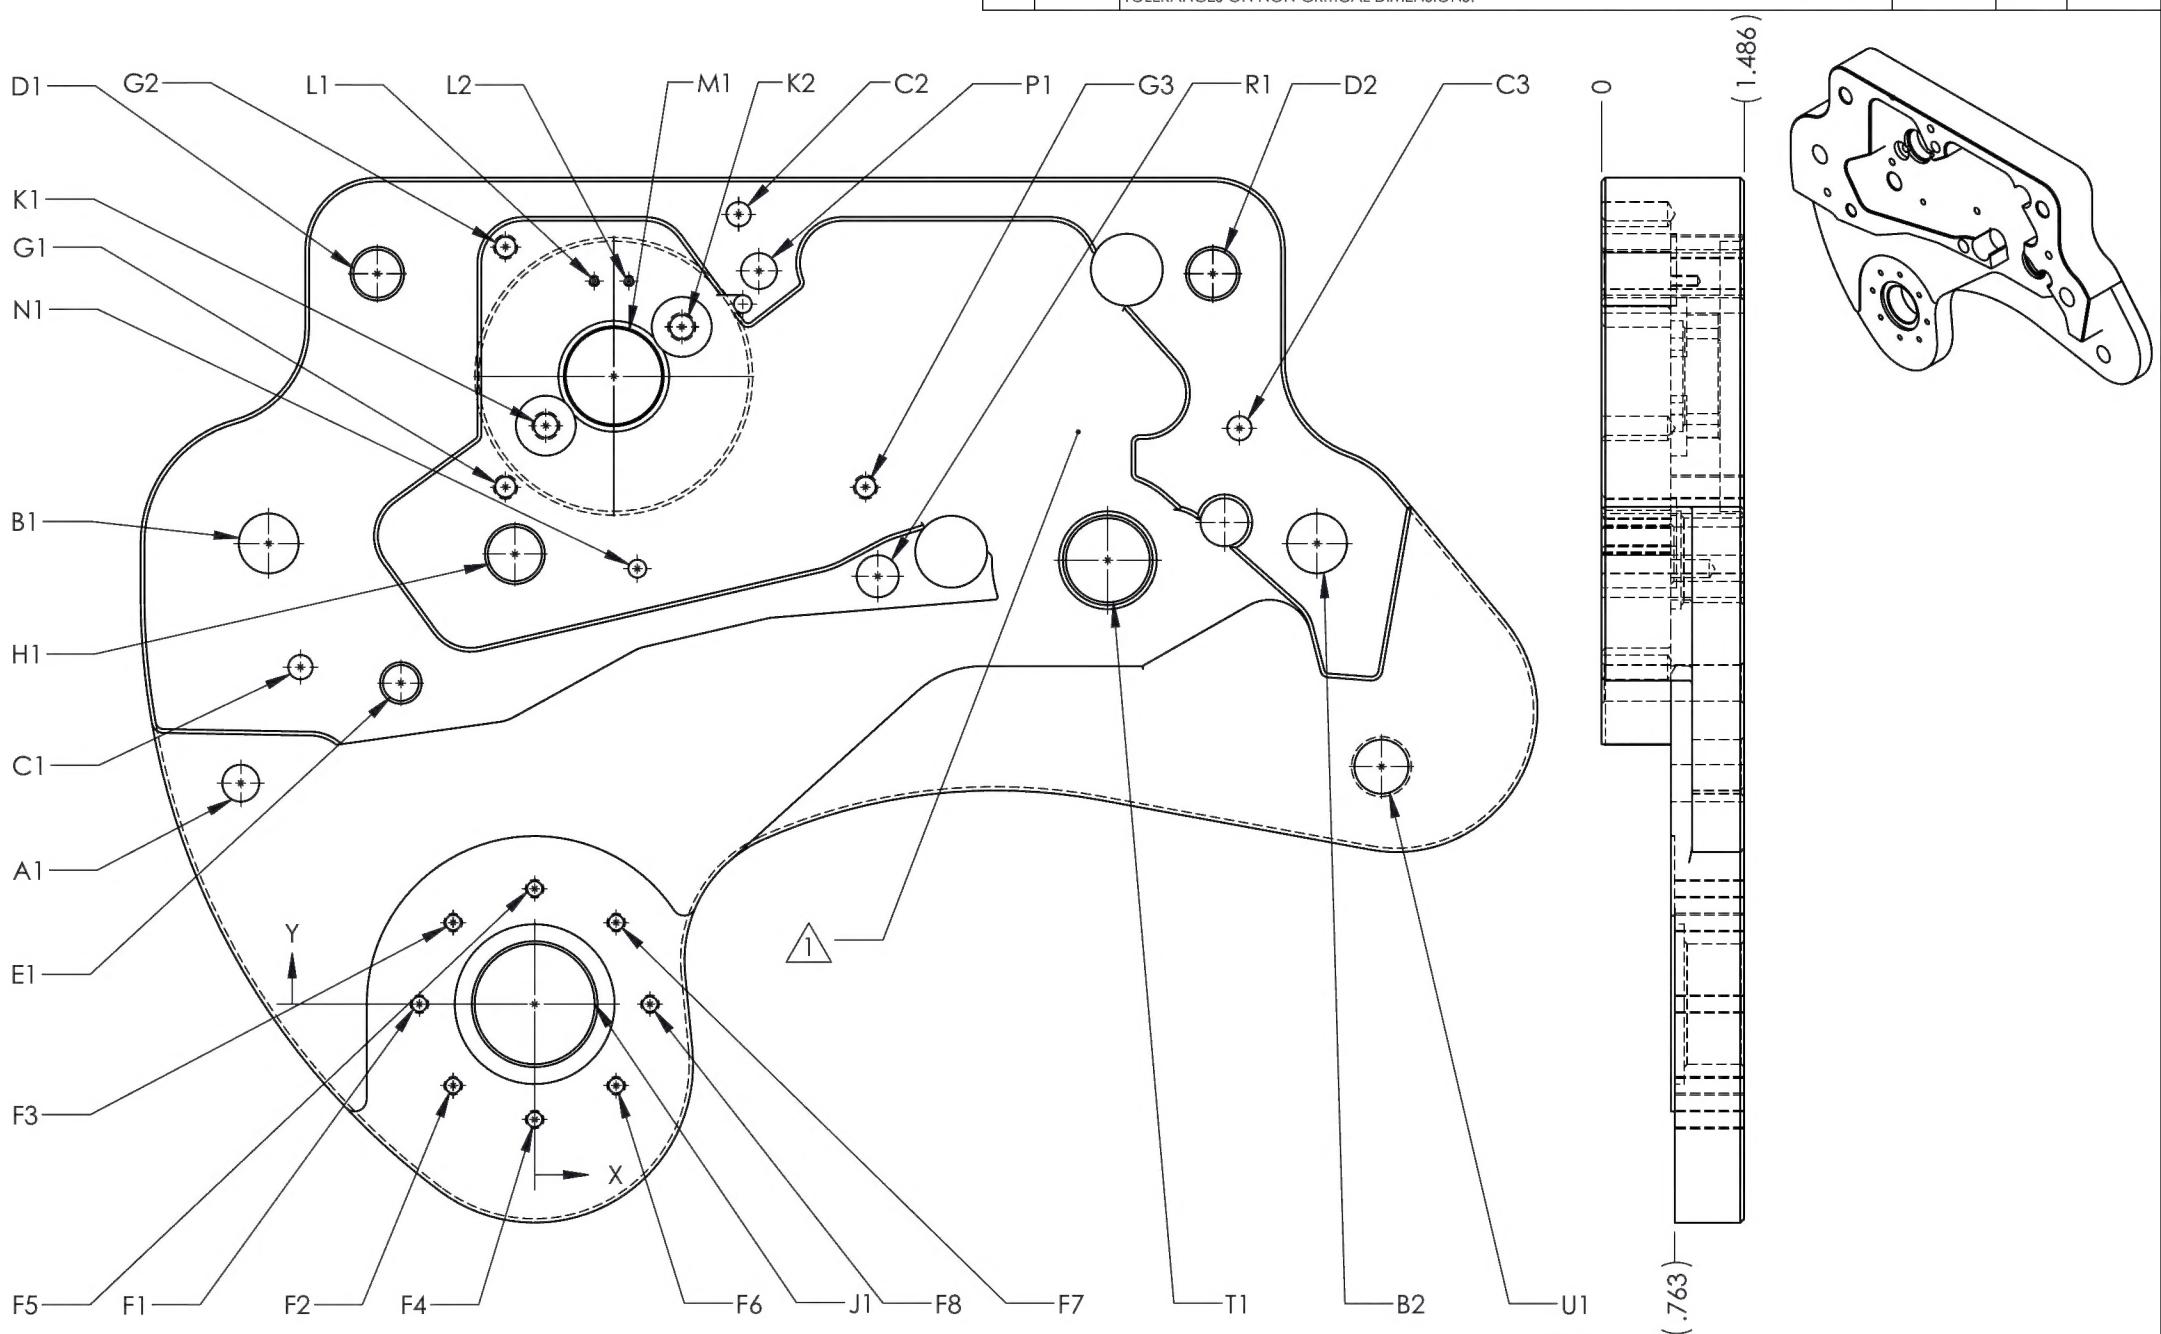


NOTE:
1 MACHINE ENGRAVE BATCH NUMBER.

DART AEROSPACE	
TITLE SIDE PLATE - SOLENOID SIDE	
DWG NO. C20-200 REV 3	
MATL 7075-T7351 DRAWN BY: CANAM	
UNLESS OTHERWISE SPECIFIED APPROVED <i>D. Weil</i>	
DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8	
.XX ± .01 ANGLES ± 5°	
.X ± .1	
HEAT TREAT FINISH BLACK ANODIZE	
SPEC MIL-A-8625F, TYPE II, CLASS II	
OR. .015R USED ON MODEL	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	
SCALE 1:2	DATE 7/13/2007
SHEET 1 OF 2	

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED

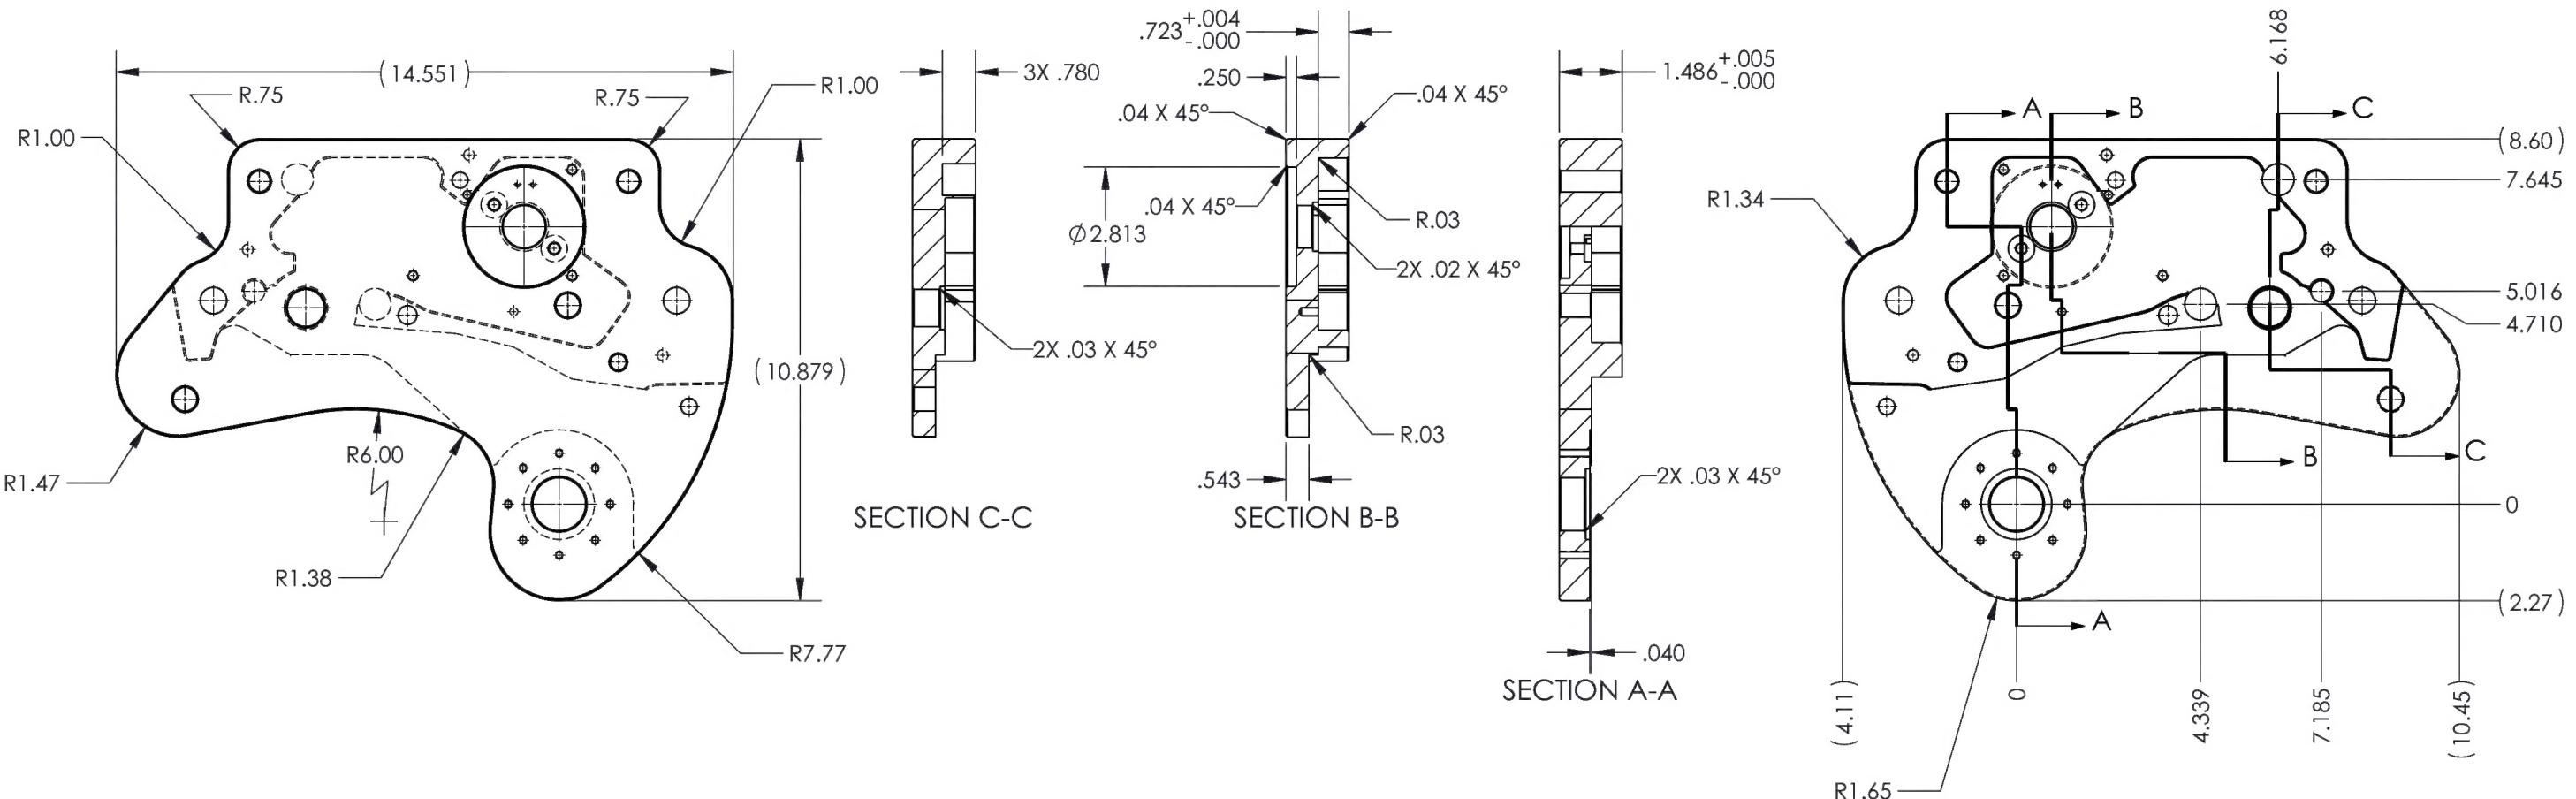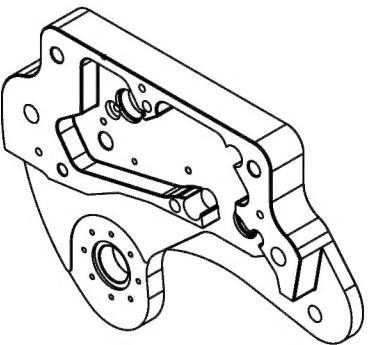

SIDE PLATE - SOL ENOID SIDE

C20-200

2

MAT'L 7075-T7351		DRAWN BY: CANAM <i>D. Weil</i>
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		APPROVED
.XXX ± .005	FRACTIONS ± 1/8	HEAT
.XX ± .01	ANGLES ± .5°	TREAT
.X ± .1		FINISH BLACK ANODIZE
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R		SPEC MIL-A-8625F, TYPE II, CLASS II
2. DIMENSIONAL LIMITS APPLY AFTER PLATING		USED ON MODEL
SCALE 1:1	DATE 7/12/2007	SHEET 2 OF 2